


2Мп Видеокамера

IPC-322-PF28K

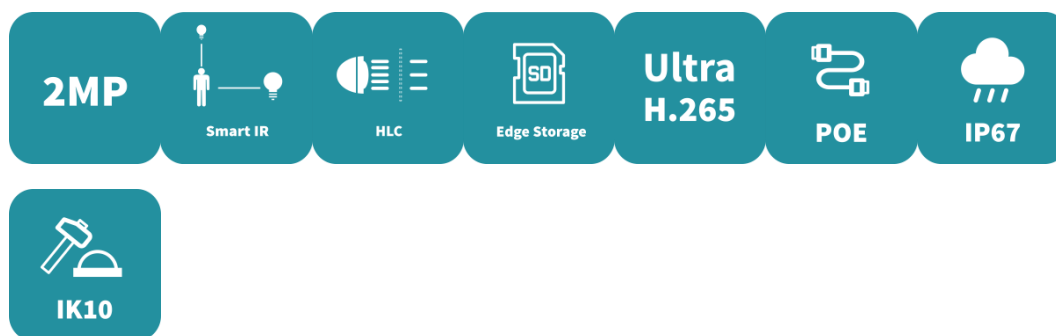

Функции

- Высококачественное изображение благодаря 2-мегапиксельной матрице CMOS 1/2,9 дюйма.
- 2 МП (1920*1080) при 25/20 кадрах в секунду; 720P (1280*720) при 25/20 кадрах в секунду
- Ультра 265, H.265, H.264
- 2D/3D DNR (цифровое шумоподавление)
- ROI (область интереса)
- Соответствие ONVIF
- Smart IR, расстояние ИК до 30 м (98 футов)
- Поддержка карты Micro SD объемом 128 ГБ.
- 2 оси
- Широкий температурный диапазон: 40C ~ 60C
- Источник питания постоянного тока 12 В или PoE (IEEE 802.3af)
- IP67
- IK10

Описание	
Максимальное разрешение	2Мп
Датчик	1/2.9" CMOS
Мин. Освещение	Цвет: 0,02 люкс (F2.1, АРУ ВКЛ.) 0 люкс с включенной ИК-подсветкой
День/Ночь	ИК-фильтр с автоматическим переключением (ICR)
Затвор	Авто/Ручной, 1 ~ 1/100000 с
Угол регулировки	Pan: 3° ~ 360°, Tilt: 0° ~ 75°
S/N	>52dB
WDR	DWDR
Lens	Description
Фокусное расстояние	2.8мм
Iris Type	Fixed
Iris	F2.1
Поле зрения (Г)	101.1°
Поле зрения (В)	55.0°
Поле зрения (D)	111.0°
DORI	Description
DORI Distance(Lens)	2.8mm
DORI Distance(Detect)	45.0(147.6ft)
DORI Distance(Observe)	18.0(59.1ft)
DORI Distance(Recognize)	9.0(29.5ft)
DORI Distance(Identify)	4.5(14.8ft)
Illuminator	Description
Illumination Distance(IR)	Up to 30m (98ft)
Wavelength	850nm
IR On/Off Control	Auto/Manual
Video	Description
Video Compression	Ultra 265; H.265; H.264
H.264 Code Profile	Baseline profile, Main profile, High profile

Frame Rate	Main Stream: 1080P (1920*1080), Max 25fps; 720P (1280*720), Max 25fps; Sub Stream: D1 (720*576), Max 25fps; 640*360,Max 25fps; 2CIF(704*288), Max 25fps; CIF(352*288), Max 25fps
Video Bit Rate	128 Kbps ~ 6144 Kbps
U-code	Support
OSD	Up to 4 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Video Stream	Dual Streams
Image	Description
White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal; Flip Vertical; Flip Horizontal; 180°
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Events	Description
Basic Detection	Motion Detection
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP Authentication
Storage	Description
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR
Network	Description
Protocols	IPv4; IGMP; ICMP; TCP; UDP; DHCP; RTP; RTSP; RTCP; RTMP; DNS; DDNS; NTP; UPnP; HTTP; HTTPS; QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T); API
User/Host	Up to 32 users, 2 user levels: administrator and common user
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above

Interface	Description
Audio I/O	N/A
Alarm I/O	N/A
Built-in Mic	N/A
Built-in Speaker	N/A
WIFI	N/A
Network	1 x RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
Certification	Description
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1) CB (IEC 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529) IK10 (IEC 62262)
General	Description
Power	DC 12V $\pm$ 25%, PoE (IEEE 802.3af) Power consumption: Max 3.3W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions	Ø109x 81mm (Ø4.3" x 3.2")
Weight	0.36kg (0.79lb)
Working Environment	-40 °C ~ 60 °C, Humidity: ≤95% RH (non-condensing)
Storage Environment	-40 °C ~ 60 °C, Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Reset Button	N/A

[illegible]

EVO | evolution.com.kz